

# UTILITY PATENT APPLICATION TRANSMITTAL

## (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
2204/149Total Pages in this Submission  
175**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

SYSTEM, DEVICE, AND METHOD FOR SUPPORTING VIRTUAL PRIVATE NETWORKS IN A LABEL SWITCHED COMMUNICATION NETWORK

and invented by:

James V. Luciani  
Andre N. Fredette  
Bill HaweJC678 U.S. PTO  
09/434338

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☐ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 40 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☒ Cross References to Related Applications (if applicable)
  - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
  - d. ☐ Reference to Microfiche Appendix (if applicable)
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings (if drawings filed)
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
2204/149

Total Pages in this Submission  
175

## Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☐ Formal Number of Sheets \_\_\_\_\_
- b. ☒ Informal Number of Sheets 16
4. ☒ Oath or Declaration
- a. ☐ Newly executed (original or copy) ☒ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

## Accompanying Application Parts

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail (Specify Label No.): EL36171552SUS

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
2204/149

Total Pages in this Submission  
175

## Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)


16. ☐ Additional Enclosures (please identify below):

## Fee Calculation and Transmittal

### CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	60	- 20 =	40	x \$18.00	\$720.00
Indep. Claims	5	- 3 =	2	x \$78.00	\$156.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$1,636.00

- ☐ A check in the amount of \_\_\_\_\_ to cover the filing fee is enclosed.
- ☐ The Commissioner is hereby authorized to charge and credit Deposit Account No. \_\_\_\_\_ as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of \_\_\_\_\_ as filing fee.
  - ☐ Credit any overpayment.
  - ☐ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
  - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

  
Signature

Jeffrey T. Klayman, Reg. No. 39,250  
BROMBERG & SUNSTEIN LLP  
125 Summer Street  
Boston, MA 02110  
(617) 443-9292

Dated: November 4, 1999

CC:

**CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)**

Applicant(s): Luciani et al.

Docket No.

2204/149

Serial No.

Not Yet Assigned

Filing Date

Herewith

Examiner

Not Yet Assigned

Group Art Unit

Not Yet Assigned


Invention: SYSTEM, DEVICE, AND METHOD FOR SUPPORTING VIRTUAL PRIVATE NETWORKS IN A LABEL SWITCHED COMMUNICATION NETWORK

I hereby certify that this Utility Patent Application Transmittal and enclosures referred to therein  
(Identify type of correspondence)

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under  
37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231 on  
November 4, 1999  
(Date)

Jeffrey T. Klayman

(Typed or Printed Name of Person Mailing Correspondence)



(Signature of Person Mailing Correspondence)

EL361715525US

("Express Mail" Mailing Label Number)

Note: Each paper must have its own certificate of mailing.

JCS78 U.S. PTO  
09/434338  
11/04/99



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR UNITED STATES PATENT

FOR

**SYSTEM, DEVICE, AND METHOD FOR SUPPORTING  
VIRTUAL PRIVATE NETWORKS IN A LABEL SWITCHED  
COMMUNICATION NETWORK**

Inventor:

**James V. Luciani**

**Andre N. Fredette**

**Bill Hawe**

Attorney Docket: 2204/149 (PP352)

Attorneys:

**BROMBERG & SUNSTEIN LLP**  
125 Summer Street  
Boston, MA 02110  
(617) 443-9292

-1-

**SYSTEM, DEVICE, AND METHOD FOR SUPPORTING  
VIRTUAL PRIVATE NETWORKS IN A LABEL SWITCHED  
COMMUNICATION NETWORK**

5

**CROSS-REFERENCE TO RELATED APPLICATION**

10 The present invention may be related to the following commonly owned United States patent application, which is hereby incorporated by reference in its entirety:

U.S. Application No. 09/309,530 entitled SYSTEM, DEVICE, AND METHOD FOR SUPPORTING VIRTUAL PRIVATE NETWORKS, which was filed on May 11, 1999 in the names of James V. Luciani and Matthew Squire (Attorney Docket No. 2204/132).

15

**FIELD OF THE INVENTION**

20

The present invention relates generally to communication systems, and more particularly to supporting virtual private networks in a multi-protocol label switching (MPLS) environment.

25

**BACKGROUND OF THE INVENTION**

30

In today's information age, communication devices, such as computers and computer peripherals, are often internetworked over a communication network. For various reasons, it is sometimes necessary or desirable for the communication network to be shared by multiple consumers. Because each of the consumers typically needs to maintain a certain amount of autonomy, the communication network is divided into a number of Virtual Private Networks (VPNs), where each VPN emulates a single, private network.

35

Various mechanisms for supporting VPNs in an MPLS environment are described in the IETF Internet Draft documents entitled VPN SUPPORT WITH MPLS [draft-heinenen-mpls-vpn-01.txt (March 1998)], MPLS VPN ARCHITECTURE [draft-jamieson-

mpls-vpn-00.txt (August 1998)], IP VPN REALIZATION USING MPLS TUNNELS [draft-casey-vpn-mpls-00.txt (November 1998)], and CPE BASED VPNS USING MPLS [draft-li-mpls-vpn-00.txt], all of which are hereby incorporated by reference in their entireties.

## SUMMARY OF THE INVENTION

In accordance with one aspect of the invention, a LSP is established for a VPN by including label information and a VPN identifier in NHRP messages and using the NHRP messages to establish the LSP for the VPN.

In order to establish a LSP for a forward path from an ingress device to an egress device, the ingress device sends a NHRP request message including a label request and the VPN identifier. The NHRP request message is forwarded hop-by-hop from the ingress device to the egress device by each intermediate device on the forward path. The egress device allocates a forward path label for a LSP segment from a previous hop device to the egress device, and sends a NHRP reply message including the forward path label and the VPN identifier. Each intermediate device on the forward path receives from the next hop device on the forward path a NHRP reply message including a forward path label for a LSP segment to the next hop device and the VPN identifier. Each intermediate device establishes a LSP to the next hop device using the forward path label from the NHRP reply message, allocates a forward path label for a LSP segment from the previous hop device on the forward path to the intermediate device, and sends a NHRP reply message including the forward path label and the VPN identifier. Upon receiving a NHRP reply message including a forward path label and the VPN identifier, the ingress device establishes a LSP to the next hop device on the forward path using the forward path label from the NHRP reply message.

In order to establish a LSP for a return path from an egress device to an ingress device, the ingress device sends a NHRP request message including a return path label for a LSP segment from a next hop device to the ingress device and the VPN identifier. Each intermediate device on the forward path receives from the previous hop device on the forward path a NHRP request message including a return path label and the VPN identifier. Each intermediate device establishes a LSP to the previous hop device using the

return path label from the NHRP request message, allocates a return path label for a LSP segment from a next hop device to the intermediate device, and sends to the next hop device a NHRP request message including the return path label and the VPN identifier. Upon receiving a NHRP request message including a return path label and the VPN identifier, the egress device establishes a LSP to the previous hop device using the return path label from the NHRP request message.

In order to forward NHRP messages, each intermediate device that forwards the NHRP request message may maintain previous hop state information for the previous hop device, in which case the intermediate device forwards the NHRP reply message to the previous hop device based upon the previous hop state information. Alternatively, each intermediate device that forwards the NHRP request message may insert a device address into a forward path address list, in which case the intermediate device forwards the NHRP reply message to the previous hop device based upon a previous hop device address in a return path address list included in the NHRP reply message.

### BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects and advantages of the invention will be appreciated more fully from the following further description thereof with reference to the accompanying drawings wherein:

FIG. 1 is a block diagram showing an exemplary MPLS communication system including an Ingress Station in communication with an Egress Station via an MPLS Network;

FIG. 2 is a block diagram showing an exemplary MPLS communication system in which the MPLS Network includes four (4) intermediate devices;

FIG. 3A is a block diagram showing an exemplary communication system where the forward path and the return path traverse the same intermediate devices;

FIG. 3B is a block diagram showing an exemplary communication system where the forward path and the return path traverse different intermediate devices;

FIG. 4 is a block diagram showing the format of an exemplary VPN-ID TLV field in accordance with an embodiment of the present invention;

FIG. 5 is a block diagram showing an exemplary communication system in which a



label request is included along with a VPN identifier in the NHRP Resolution Request message in accordance with an embodiment of the present invention;

FIG. 6 is a block diagram showing an exemplary communication system in which the label mappings and VPN identifier are conveyed in NHRP Resolution Reply messages that are forwarded hop-by-hop along the return path in accordance with an embodiment of the present invention;

FIG. 7 is a block diagram showing an exemplary communication system in which NHRP Label Mapping messages are used to convey label mapping information and the VPN identifier to the devices along the forward path in accordance with an embodiment of the present invention;

FIG. 8 is a block diagram showing an exemplary communication system in which NHRP Resolution Reply messages are used to convey label mapping information and the VPN identifier to the devices along the forward path in accordance with an embodiment of the present invention;

FIG. 9A is a logic flow diagram showing exemplary intermediate device logic for forcing the NHRP Resolution Reply messages to follow the forward path rather than the return path by maintaining previous hop information in accordance with an embodiment of the present invention;

FIG. 9B is a logic flow diagram showing exemplary egress device logic for forcing the NHRP Resolution Reply messages to follow the forward path rather than the return path by maintaining previous hop information in accordance with an embodiment of the present invention;

FIG. 9C is a logic flow diagram showing exemplary intermediate device logic for forcing the NHRP Resolution Reply messages to follow the forward path rather than the return path by maintaining previous hop information in accordance with an embodiment of the present invention;

FIG. 10A is a logic flow diagram showing exemplary intermediate device logic for forcing the NHRP Resolution Reply messages to follow the forward path rather than the return path using a list of addresses in accordance with an embodiment of the present invention;

FIG. 10B is a logic flow diagram showing exemplary egress device logic for

forcing the NHRP Resolution Reply messages to follow the forward path rather than the return path using a list of addresses in accordance with an embodiment of the present invention;

FIG. 10C is a logic flow diagram showing exemplary intermediate device logic for forcing the NHRP Resolution Reply messages to follow the forward path rather than the return path using a list of addresses in accordance with an embodiment of the present invention; and

FIG. 11 is a block diagram showing an exemplary communication system for creating bi-directional paths in accordance with an embodiment of the present invention.

#### DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

A common networking model routes packets of information within the communication network using a networking protocol such as the Internet Protocol (IP) or other network layer protocol. Some networking protocols, such as IP, are considered to be "connectionless" networking protocols. In a connectionless networking protocol, each packet of information includes a network layer address, and each router forwards the packet of information based upon the network layer address according to a predetermined routing protocol such as the Open Shortest Path First (OSPF) protocol, the Routing Information Protocol (RIP), Hello, or other routing protocol.

Thus, each router makes an independent forwarding decision for the packet based upon the network layer address. Essentially, each router partitions the entire set of network layer addresses into a number of Forwarding Equivalence Classes (FECs), and each FEC is mapped to a particular outgoing path (or set of paths, in the case of multi-path routing) based upon the routing protocol. The router determines an FEC for each packet of information based upon the network layer address of the packet, and forwards the packet of information to the corresponding outgoing path (or set of paths).

Network layer routing requires each router to process each packet of information at the network layer. This is an expensive and time-consuming operation that limits the performance of some routers and even prevents certain devices that do not support the networking protocol from performing routing and other functions on the packets.

Label switching can be used to eliminate the network layer processing by certain devices in the communication network. Label switching enables a packet to be transported across a network domain (referred to hereinafter as an "autonomous system" or "AS") using labels rather than the network layer address. Specifically, a Label Switched Path (LSP) is established from an ingress point border device to an egress point border device in the AS. The LSP traverses a number of label switching devices. Each label switching device assigns a short, fixed-length value (i.e., a "label") to each FEC that it supports. When the packet enters the ingress point border device, the ingress point border device uses the network address to assign the packet to a particular FEC, and inserts the corresponding label into the packet, specifically within a packet header. Each subsequent label switching device along the LSP uses the label in the packet to determine the next hop FEC for the packet, and replaces the label in the packet with a new label corresponding to the next hop FEC for the packet. The egress point border device removes the label from the packet. Thus, only the ingress point border device processes the packet at the network layer, and subsequent devices process the packet based upon the label only.

The Internet Engineering Task Force (IETF) Multi-Protocol Label Switching (MPLS) working group has defined an MPLS architecture for utilizing label switching for internetworking. MPLS is considered to be "multi-protocol" because it can be used with any network layer protocol, and is not limited to IP. An MPLS framework is described in an IETF Internet Draft document entitled A FRAMEWORK FOR MULTIPROTOCOL LABEL SWITCHING [draft-ietf-mpls-framework-02.txt (November 1997)], and is hereby incorporated by reference in its entirety. The MPLS architecture is described in an IETF Internet Draft document entitled MULTIPROTOCOL LABEL SWITCHING ARCHITECTURE [draft-ietf-mpls-arch-05.txt (April 1999)], and is hereby incorporated by reference in its entirety.

In order to use label switching for internetworking, each label switching device must learn the labels that are used by its neighboring label switching device(s). Therefore, the IETF MPLS working group has defined a Label Distribution Protocol (LDP) for distributing labels between neighboring label switching devices. LDP is described in an IETF Internet Draft document entitled LDP SPECIFICATION [draft-ietf-mpls-ldp-04.txt (May 1999)], and is hereby incorporated by reference in its entirety. The use of LDP for

label switching in an Asynchronous Transfer Mode (ATM) network is described in an IETF Internet Draft document entitled MPLS USING LDP AND ATM VC SWITCHING [draft-ietf-mpls-atm-02.txt (April 1999)], and is hereby incorporated by reference in its entirety.

5 Each label switching device maintains a label information base (LIB) for mapping each FEC to a corresponding label. When the label switching device receives a packet including a label, the label switching device utilizes the LIB to map the received label to a next hop FEC and to retrieve a label for the next hop FEC. The label switching device then replaces the label in the packet with the label for the next hop FEC, and forwards the  
10 resulting packet to the corresponding outgoing path (or set of paths).

For various reasons, it is sometimes necessary or desirable for the communication network to be shared by multiple consumers. Because each of the consumers typically needs to maintain a certain amount of autonomy, the communication network is divided into a number of Virtual Private Networks (VPNs), where each VPN emulates a single,  
15 private network.

Various mechanisms for supporting VPNs in an MPLS environment are described in the IETF Internet Draft documents entitled VPN SUPPORT WITH MPLS [draft-heinane-mpls-vpn-01.txt (March 1998)], MPLS VPN ARCHITECTURE [draft-jamieson-mpls-vpn-00.txt (August 1998)], IP VPN REALIZATION USING MPLS TUNNELS [draft-casey-vpn-mpls-00.txt (November 1998)], and CPE BASED VPNS USING MPLS [draft-li-mpls-vpn-00.txt], all of which are hereby incorporated by reference in their  
20 entireties.

In an exemplary embodiment of the present invention, label switching is used to support VPNs in an MPLS environment by establishing a LSP for each VPN. Each station  
25 (host or router) maps each LSP to its respective VPN. Protocol messages that are associated with a particular VPN are carried over the corresponding LSP, specifically by inserting the appropriate label into the protocol messages and forwarding the protocol messages over the LSP.

Specifically, in a preferred embodiment of the present invention, the Next Hop  
30 Resolution Protocol (NHRP) is utilized for transporting MPLS label request and label mapping messages in order to support VPNs in an MPLS environment. NHRP is

described in an IETF Request For Comments (RFC) document entitled NBMA NEXT HOP RESOLUTION PROTOCOL (NHRP) [RFC 2332 (April 1998)]. NHRP enables a source station (host or router) to determine the internetworking layer address and subnetwork addresses of a next hop station. NHRP can be used to support VPNs, for example, as described in the IETF Internet Draft entitled NHRP SUPPORT FOR VIRTUAL PRIVATE NETWORKS [draft-ietf-ion-nhrp-vpn-00.txt], which is hereby incorporated by reference in its entirety, and in the related application entitled SYSTEM, DEVICE, AND METHOD FOR SUPPORTING VIRTUAL PRIVATE NETWORKS, which was incorporated by reference above.

FIG. 1 shows an exemplary MPLS communication system 100 including an Ingress Station 102 in communication with an Egress Station 106 via an MPLS Network 104. The MPLS Network 104 includes a number of intermediate devices, such as switches and routers, that physically and logically interconnect the Ingress Station 102 and the Egress Station 106. In accordance with the present invention, a LSP is established for a particular VPN from the Ingress Station 102 to the Egress Station 106 across the MPLS Network 104, and particularly across a number of intermediate devices. NHRP is used to convey label information and a VPN identifier hop-by-hop between the Ingress Station 102 and the Egress Station 106, allowing the Ingress Station 102, the Egress Station 106, and the number of intermediate devices through which the Ingress Station 102 and the Egress Station 106 are interconnected to correlate the LSP with the particular VPN.

FIG. 2 shows an exemplary communication system 200 in which the MPLS Network 104 includes four (4) intermediate devices, namely the intermediate device I1 (202), the intermediate device I2 (204), the intermediate device I3 (206), and the intermediate device I4 (208). In the exemplary communication system 200 shown in FIG. 2, there are two paths between the Ingress Station 102 and the Egress Station 106, specifically one path that traverses the intermediate devices I1 (202) and I2 (204), and one path that traverses the intermediate devices I3 (206) and I4 (208).

When NHRP is used to obtain addressing information for establishing a connection, a NHRP Resolution Request message is forwarded hop-by-hop across a forward path from an ingress device to an egress device, and a NHRP Resolution Reply message including the addressing information is forwarded hop-by-hop across a return

path from the egress device to the ingress device. The forward path and the return path may traverse the same or different intermediate devices.

FIG. 3A shows an exemplary communication system where the forward path and the return path traverse the same intermediate devices. Specifically, in the exemplary communication system shown in FIG. 3A, the forward path and the return path traverse the intermediate devices I1 (202) and I2 (204). The Ingress Station 102 sends a NHRP Resolution Request message 302 to the intermediate device I1 (202), which in turn sends a NHRP Resolution Request message 304 to the intermediate device I2 (204), which in turn sends a NHRP Resolution Request message 306 to the Egress Station 106. The Egress Station 106 sends a NHRP Resolution Reply message 308 to the intermediate device I2 (204), which in turn sends a NHRP Resolution Reply message 310 to the intermediate device I1 (202), which in turn sends a NHRP Resolution Reply message 312 to the Ingress Station 102.

FIG. 3B shows an exemplary communication system where the forward path and the return path traverse different intermediate devices. Specifically, in the exemplary communication system shown in FIG. 3B, the forward path traverses the intermediate devices I1 (202) and I2 (204), while the return path traverses the intermediate devices I4 (208) and I3 (206). The Ingress Station 102 sends a NHRP Resolution Request message 302 to the intermediate device I1 (202), which in turn sends a NHRP Resolution Request message 304 to the intermediate device I2 (204), which in turn sends a NHRP Resolution Request message 306 to the Egress Station 106. The Egress Station 106 sends a NHRP Resolution Reply message 314 to the intermediate device I4 (208), which in turn sends a NHRP Resolution Reply message 316 to the intermediate device I3 (206), which in turn sends a NHRP Resolution Reply message 318 to the Ingress Station 102.

In order to establish a LSP for a particular VPN from an ingress device to an egress device, each device along the forward path from the ingress device to the egress device must "learn" a label for its next hop neighboring device and associate the label with the particular VPN. For example, with reference to FIG. 3A, in order to establish the LSP for the particular VPN from the Ingress Station 102 to the Egress Station 106, the Ingress Station 102 must "learn" a label for the intermediate device I1 (202), the intermediate device I1 (202) must "learn" a label for the intermediate device I2 (204), and the

intermediate device I2 (204) must "learn" a label for the Egress Station 106. Therefore, in a preferred embodiment of the present invention, label information is conveyed in NHRP messages (often referred to as "piggybacking") along with a VPN identifier so that each device along the forward path can correlate the LSP with the particular VPN. Specifically, a label request is conveyed along with a VPN identifier in a NHRP Resolution Request message that is forwarded hop-by-hop along the forward path from the ingress device to the egress device. Label mapping information is conveyed along with a VPN identifier in NHRP reply messages that are forwarded hop-by-hop from the egress device to each device in the forward path and ultimately to the ingress device.

The related application entitled SYSTEM, DEVICE, AND METHOD FOR SUPPORTING VIRTUAL PRIVATE NETWORKS, which was incorporated by reference above, describes a VPN Identifier (VPN-ID) Type-Length-Value (TLV) field that may be encoded into certain NHRP messages, specifically NHRP Resolution Request and Resolution Reply messages. The VPN-ID TLV field includes, among other things, a VPN identifier identifying the VPN. By including the VPN identifier in the NHRP Resolution Request and Resolution Reply messages, the ingress and egress stations are able to associate a particular Virtual Channel Connection (VCC) with a particular VPN, as indicated by the VPN identifier in the NHRP message.

In a preferred embodiment of the present invention, the VPN-ID TLV field is extended to include label information in addition to the VPN identifier. FIG. 4 shows the format of an exemplary VPN-ID TLV field 400 including both a VPN identifier and label information. As shown in FIG. 4, the preferred VPN-ID TLV field 400 includes a header field 410, a VPN-ID field 420, and a Label Information field 430. The header field 410 includes a Compulsory field 411, an unused field 412, a Type field 413, and Length field 414. In a preferred embodiment of the present invention, the VPN-ID TLV field 400 is considered be "compulsory" as that term is used with reference to TLV extensions in the IETF RFC document entitled NBMA NEXT HOP RESOLUTION PROTOCOL (NHRP), which was incorporated by reference above, and therefore the Compulsory field 411 is always set to the value one (1). The Length field 414 indicates the length of the VPN-ID TLV field 400, which is preferably equal to twelve (12) bytes (0x0C in hexadecimal). The Type field 413 for the VPN-ID TLV field 400 is not yet assigned. The Label Information

430 field may contain label request information (in the case of a NHRP Resolution Request or other request message) or label mapping information (in the case of a NHRP reply message), as described in detail below. By including both the VPN identifier and the label information in the NHRP messages, each station and intermediate device is able to  
5 associate a particular LSP, as indicated by the label information in the NHRP message, with a particular VPN, as indicated by the VPN identifier in the NHRP message.

In various embodiments of the present invention, the ingress device sends a label request along with a VPN identifier to the egress device by including the label request and VPN identifier in a NHRP Resolution Request message. Specifically, the ingress device  
10 sends a NHRP Resolution Request message with a VPN-ID TLV field 400 including the label request and VPN identifier in the Label Information field 430 and VPN-ID field 420, respectively. Each device along the forward path transfers the VPN-ID TLV field 400 in a NHRP Resolution Request message that is forwarded to the next hop device.

FIG. 5 shows an exemplary communication system in which the label request is included along with a VPN identifier in the NHRP Resolution Request message. As shown in FIG. 5, the Ingress Station 102 sends to the intermediate device I1 (202) a NHRP Resolution Request message 502 with a VPN-ID TLV field 400 including the label request in the Label Information field 430. The intermediate device I1 (202) in turn sends to the intermediate device I2 (204) a NHRP Resolution Request message 504 with the VPN-ID  
15 TLV field 400 from the NHRP Resolution Request message 502. The intermediate device I2 (204) in turn sends to the Egress Station 106 a NHRP Resolution Request message 506 with the VPN-ID TLV field 400 from the NHRP Resolution Request message 504.

As discussed above, each device along the forward path from the ingress device to the egress device "learns" a label for its next hop neighboring device from label mapping  
25 information that is conveyed along with a VPN identifier in NHRP reply messages that are forwarded hop-by-hop from the egress device to each device in the forward path and ultimately to the ingress device.

A first exemplary embodiment of the present invention enables each device along the forward path to "learn" a label for its next hop neighboring device when the forward  
30 path and the return path traverse the same intermediate devices. Because the forward path and the return path traverse the same intermediate devices, message flows are described



relative to the forward path for the sake of clarity. Thus, when sending a message to a neighboring device on the return path, a particular device is said to send a message to the previous hop device on the forward path rather than to the next hop device on the return path.

In this first exemplary embodiment of the present invention, the label mapping information may be included along with a VPN identifier in NHRP Resolution Reply messages that are forwarded hop-by-hop across the return path. In this case, upon receiving the NHRP Resolution Request message including the label request and the VPN identifier, the egress device allocates a label for the previous hop on the forward path and sends to the previous hop device on the forward path a NHRP Resolution Reply message with a VPN-ID TLV field 400 including the label for the previous hop on the forward path and the VPN identifier, specifically within the Label Information field 430 and VPN-ID field 420 of the VPN-ID TLV field 400, respectively. Upon receiving the NHRP Resolution Reply message from its next hop device on the forward path, each device along the return path extracts from the NHRP Resolution Reply message the label associated with the next hop on the forward path and the VPN identifier, specifically from the Label Information field 430 and VPN-ID field 420 of the VPN-ID TLV field 400, respectively. Each device along the return path allocates a label for the previous hop on the forward path, and sends to the previous hop device on the forward path a NHRP Resolution Reply message with a VPN-ID TLV field 400 including the label for the previous hop on the forward path and the VPN identifier, specifically in the Label Information field 430 and VPN-ID field 420 of the VPN-ID TLV field 400, respectively. Each device along the return path creates the appropriate LIB entries in order to map the labels associated with the LSP to the particular VPN indicated by the VPN identifier.

FIG. 6 shows an exemplary communication system in which the label mappings and VPN identifier are conveyed in NHRP Resolution Reply messages that are forwarded hop-by-hop along the return path. Upon receiving the NHRP Resolution Request message 506 including the VPN-ID TLV field 400 including the label request and the VPN identifier, the Egress Station 106 allocates a label for the LSP segment from the intermediate device I2 (204), and sends to the intermediate device I2 (204) over the return path a NHRP Resolution Reply message 602 with a VPN-ID TLV field 400 including the

label and the VPN identifier, specifically in the Label Information field 430 and the VPN-ID field 420 of the VPN-ID TLV field 400, respectively. Upon receiving the NHRP Resolution Reply message 602, the intermediate device I2 (204) allocates a label for the LSP segment from the intermediate device I1 (202), and sends to the intermediate device I1 (202) over the return path a NHRP Resolution Reply message 604 with a VPN-ID TLV field 400 including the label and the VPN identifier, specifically in the Label Information field 430 and the VPN-ID field 420 of the VPN-ID TLV field 400, respectively. Upon receiving the NHRP Resolution Reply message 604, the intermediate device I1 (202) allocates a label for the LSP segment from the Ingress Station 102, and sends to the Ingress Station 102 over the return path a NHRP Resolution Reply message 606 with a VPN-ID TLV field 400 including the label and the VPN identifier, specifically in the Label Information field 430 and the VPN-ID field 420 of the VPN-ID TLV field 400, respectively.

Unfortunately, as discussed above, the forward path and the return path may traverse different intermediate devices. In this case, the label mapping information cannot simply be included along with a VPN identifier in NHRP Resolution Reply messages that are forwarded hop-by-hop across the return path, since such label mapping information will not be received by the devices along the forward path as required to establish the LSP for the VPN.

Therefore, in a second exemplary embodiment of the present invention, a new NHRP Label Mapping message is used to convey label mapping information to the devices along the forward path, while NHRP Resolution Reply messages are forwarded hop-by-hop across the return path as usual. Specifically, when a device along the forward path receives a NHRP Resolution Request message with a VPN-ID TLV field 400 including a label request and a VPN identifier, the device forwards the NHRP Resolution Request message (in the case of an intermediate device) or sends a NHRP Resolution Reply message (in the case of the egress device). The device also allocates a label for the previous hop of the forward path, and sends to the previous hop device on the forward path a NHRP Label Mapping message including the label and the VPN identifier. Each device along the forward path creates the appropriate LIB entries in order to map the labels associated with the LSP to the particular VPN indicated by the VPN identifier.

FIG. 7 shows an exemplary communication system in which a NHRP Label Mapping message is used to convey label mapping information to the devices along the forward path from the ingress device and the egress device. As shown in FIG. 7, the Ingress Station 102 sends to the intermediate device I1 (202) a NHRP Resolution Request message 502 with a VPN-ID TLV field 400 including the label request in the Label Information field 430. Upon receiving the NHRP Resolution Request message 502, the intermediate device I1 (202) sends to the intermediate device I2 (204) a NHRP Resolution Request message 504 with the VPN-ID TLV field 400 from the NHRP Resolution Request message 502. The intermediate device I1 (202) also allocates a label for the LSP segment from the Ingress Station 102, and sends to the Ingress Station 102 a NHRP Label Mapping message 706 including the label and the VPN identifier. Upon receiving the NHRP Resolution Request message 504, the intermediate device I2 (204) sends to the Egress Station 106 a NHRP Resolution Request message 506 with the VPN-ID TLV field 400 from the NHRP Resolution Request message 504. The intermediate device I2 (204) also allocates a label for the LSP segment from the intermediate device I1 (202), and sends to the intermediate device I1 (202) a NHRP Label Mapping message 704 including the label and the VPN identifier. Upon receiving the NHRP Resolution Request message 506, the Egress Station 106 sends to the intermediate device I4 (208) a NHRP Resolution Reply message 314. The Egress Station 106 also allocates a label for the LSP segment from the intermediate device I2 (204), and sends to the intermediate device I2 (204) a NHRP Label Mapping message 702 including the label and the VPN identifier. Upon receiving the NHRP Resolution Reply message 314, the intermediate device I4 (208) sends a NHRP Resolution Reply message 316 to the intermediate device I3 (206), which in turn sends a NHRP Resolution Reply message 318 to the Ingress Station 102. Based upon the label mapping information included in the NHRP Label Mapping messages 702, 704, and 706, the Ingress Station 102, the intermediate devices I1 (202) and I2 (204), and the Egress Station 106 create the appropriate LIB entries to map the LSP to the VPN.

It should be noted that, in this second exemplary embodiment of the present invention, the devices along the forward path may create the LSP for the VPN before the NHRP resolution procedure is complete. Thus, the LSP may be created even if the NHRP resolution procedure ultimately fails. In order to handle such a contingency, the ingress

device preferably includes "clean-up" logic that deletes the LSP if the NHRP resolution procedure does not successfully complete within a predetermined period of time.

In a third exemplary embodiment of the present invention, the label mapping information is included along with a VPN identifier in NHRP Resolution Reply messages, as in the first exemplary embodiment described above with reference to FIG. 6, but the NHRP Resolution Reply messages are forced to follow the forward path rather than the return path. FIG. 8 shows an exemplary communication system in which the NHRP Resolution Reply messages are forced to follow the forward path rather than the return path. As shown in FIG. 8, the return path from the Egress Station 106 to the Ingress Station 102 traverses hops 808, 810, and 812. However, the NHRP Resolution Reply messages traverse hops 802, 804, and 806.

One way to force the NHRP Resolution Reply messages to follow the forward path rather than the return path is for each device along the forward path to maintain state information relating to the previous hop device on the forward path and route the NHRP Resolution Reply messages according to the previous hop state information. Specifically, when an intermediate device along the forward path receives a NHRP Resolution Request message including the label request and the VPN identifier, the intermediate device maintains the previous hop state information including, among other things, a route to the previous hop device on the forward path and the VPN identifier. When the egress device receives a NHRP Resolution Request message including the label request and the VPN identifier, the egress device allocates a label for the previous hop LSP segment on the forward path, and sends to the previous hop device on the forward path a NHRP Resolution Reply message including the label and the VPN identifier. When an intermediate device receives a NHRP Resolution Reply message including label mapping information and the VPN identifier, the intermediate device allocates a label for the previous hop LSP segment on the forward path, and, using the previous hop state information, sends to the previous hop device on the forward path a NHRP Resolution Reply message including the label and the VPN identifier. Because the intermediate devices along the forward path may maintain previous hop state information for multiple VPNs at any given time, the VPN identifier in the NHRP Resolution Reply message allows each device along the forward path to match the NHRP Resolution Reply message

to the correct previous hop state information for the VPN.

FIGs. 9A, 9B, and 9C are logic flow diagrams showing exemplary intermediate device logic and egress device logic for forcing the NHRP Resolution Reply messages to follow the forward path rather than the return path by maintaining previous hop state information. As shown in FIG. 9A beginning at step 902, upon receiving a NHRP Resolution Request message including a label request and a VPN identifier from a previous hop device on the forward path, in step 904, an intermediate device maintains previous hop state information including a route to the previous hop device on the forward path and the VPN identifier, in step 906, forwards the NHRP Resolution Request message to the next hop device on the forward path, in step 907, and terminates in step 908. As shown in FIG. 9B beginning at step 910, upon receiving a NHRP Resolution Request message including a label request and a VPN identifier from a previous hop device on the forwarding path, in step 912, the egress device allocates a label for the previous hop LSP segment on the forward path, in step 914, sends to the previous hop device on the forward path a NHRP Resolution Reply message including the label and the VPN identifier, in step 916, and terminates in step 918. As shown in FIG. 9C beginning at step 920, upon receiving a NHRP Resolution Reply message including label mapping information and the VPN identifier, in step 922, an intermediate device allocates a label for the previous hop LSP segment on the forward path, in step 924, sends to the previous hop device on the forward path a NHRP Resolution Reply message including the label and the VPN identifier, in step 926, and terminates in step 928.

Another way to force the NHRP Resolution Reply messages to follow the forward path rather than the return path is for each device along the forward path to add its address to a list of addresses in the NHRP Resolution Request messages forwarded along the forward path, preferably by adding a NHRP Forward Transit NHS Record Extension field to the NHRP Resolution Request message, and route the NHRP Resolution Reply messages back across the forward path by routing the NHRP Resolution Reply messages to the addresses in the list of addresses in reverse order. The NHRP Forward Transit NHS Record Extension field and its uses are described in the IETF RFC document entitled NBMA NEXT HOP RESOLUTION PROTOCOL (NHRP), which was incorporated by reference above. Each device along the forward path (except the egress device) adds a

NHRP Forward Transit NHS Record Extension field to the NHRP Resolution Request message such that, when the NHRP Resolution Request message reaches the egress device, the NHRP Resolution Request message includes the routing address of each device along the forward path. Upon receiving the NHRP Resolution Request message including the list of addresses, the egress device allocates a label for the previous hop LSP segment on the forward path, and forwards to the previous hop device on the forward path a NHRP Resolution Reply message including at least the label, the VPN identifier, and the list of addresses for at least those devices to which the NHRP Resolution Reply message must be forwarded, specifically by routing the NHRP Resolution Reply message to the last address in the list of addresses. Upon receiving a NHRP Resolution Reply message including label mapping information, the VPN identifier, and a list of remaining addresses, an intermediate device allocates a label for the previous hop LSP segment on the forward path, and sends to the previous hop device on the forward path a NHRP Resolution Reply message including at least the label, the VPN identifier, and the list of addresses for at least those devices to which the NHRP Resolution Reply message must be forwarded, specifically by routing the NHRP Resolution Reply message to the last address in the list of remaining addresses.

FIGs. 10A, 10B, and 10C are logic flow diagrams showing exemplary intermediate device logic and egress device logic for forcing the NHRP Resolution Reply messages to follow the forward path rather than the return path using a list of addresses. As shown in FIG. 10A beginning at step 1002, upon receiving a NHRP Resolution Request message including a label request, a VPN identifier, and a list of addresses, in step 1004, an intermediate device adds its address to the list of addresses, in step 1006, forwards the NHRP Resolution Request message to the next hop device on the forward path, in step 1008, and terminates in step 1010. As shown in FIG. 10B beginning at step 1012, upon receiving a NHRP Resolution Request message including a label request, a VPN identifier, and a list of addresses, in step 1014, the egress device allocates a label for the previous hop LSP segment on the forward path, in step 1016, removes the last address from the list of addresses to form a list of remaining addresses, in step 1018, sends to the last address from the list of addresses a NHRP Resolution Reply message including the label, the VPN identifier, and the list of remaining addresses, in step 1020, and terminates in step 1022.

As shown in FIG. 10C beginning at step 1024, upon receiving a NHRP Resolution Reply message including a label, a VPN identifier, and a list of addresses, in step 1026, an intermediate device allocates a label for the previous hop LSP segment on the forward path, in step 1028, removes the last address from the list of addresses to form a list of remaining addresses, in step 1030, sends to the last address from the list of addresses a NHRP Resolution Reply message including the label, the VPN identifier, and the list of remaining addresses, in step 1032, and terminates in step 1034.

In the various embodiments described above, NHRP is used to create a unidirectional path (i.e., the forward path) from the ingress device to the egress device. However, NHRP can also be used to create bi-directional paths (i.e., a forward path and a return path) between the ingress device and the egress device. The various mechanisms described above allow label mapping information to be distributed to all devices along the forward path. In order to distribute label mapping information to all devices along the return path, an exemplary embodiment of the present invention includes label mapping information in the NHRP Resolution Request messages that are forwarded along the forward path, for example, in the VPN-ID TLV field 400. Specifically, the ingress device allocates a label for next hop LSP segment on the return path, and sends to the next hop device on the forward path a NHRP Resolution Request message including the label for the next hop LSP segment on the return path and a VPN identifier, and also indicating that bi-directional paths should be created. Each intermediate device along the forward path extracts the return path label from the NHRP Resolution Request message, allocates a label for the next hop LSP segment on the return path, and sends to the next hop device a NHRP Resolution Request message including the label for the next hop LSP segment on the return path and a VPN identifier. The egress device extracts the return path label from the NHRP Resolution Request message, allocates a label for the previous hop LSP segment on the forward path, and sends the label along with the VPN identifier to the previous hop device on the forward path in a NHRP reply message (i.e., either a NHRP Resolution Reply message or a NHRP Label Mapping message, as described above).

FIG. 11 shows an exemplary communication system for creating bi-directional paths. The Ingress Station 102 allocates a label for the return path from the intermediate device I1 (202), and sends to the intermediate device I1 (202) a NHRP Resolution Request

message 1102 including the return path label and the VPN identifier. Upon receiving the NHRP Resolution Request message 1102, the intermediate device I1 (202) extracts the return path label from the NHRP Resolution Request message, allocates a label for the return path from the intermediate device I2 (204), and sends to the intermediate device I2 (204) a NHRP Resolution Request message 1104 including the return path label and the VPN identifier. Upon receiving the NHRP Resolution Request message 1104, the intermediate device I2 (204) extracts the return path label from the NHRP Resolution Request message, allocates a label for the return path from the Egress Station 106, and sends to the Egress Station 106 a NHRP Resolution Request message 1106 including the return path label and the VPN identifier.

In a preferred embodiment of the present invention, predominantly all of the logic for supporting VPNs in a label switched communication system is implemented as a set of computer program instructions that are stored in a computer readable medium and executed by an embedded microprocessor system within the various MPLS devices, including the ingress device, the intermediate devices, and the egress device. Preferred embodiments of the invention may be implemented in any conventional computer programming language. For example, preferred embodiments may be implemented in a procedural programming language (*e.g.*, "C") or an object oriented programming language (*e.g.*, "C++"). Alternative embodiments of the invention may be implemented using discrete components, integrated circuitry, programmable logic used in conjunction with a programmable logic device such as a Field Programmable Gate Array (FPGA) or microprocessor, or any other means including any combination thereof.

Alternative embodiments of the invention may be implemented as a computer program product for use with a computer system. Such implementation may include a series of computer instructions fixed either on a tangible medium, such as a computer readable media (*e.g.*, a diskette, CD-ROM, ROM, or fixed disk), or fixed in a computer data signal embodied in a carrier wave that is transmittable to a computer system via a modem or other interface device, such as a communications adapter connected to a network over a medium. The medium may be either a tangible medium (*e.g.*, optical or analog communications lines) or a medium implemented with wireless techniques (*e.g.*, microwave, infrared or other transmission techniques). The series of computer



instructions embodies all or part of the functionality previously described herein with respect to the system. Those skilled in the art should appreciate that such computer instructions can be written in a number of programming languages for use with many computer architectures or operating systems. Furthermore, such instructions may be stored  
5 in any memory device, such as semiconductor, magnetic, optical or other memory devices, and may be transmitted using any communications technology, such as optical, infrared, microwave, or other transmission technologies. It is expected that such a computer program product may be distributed as a removable medium with accompanying printed or electronic documentation (*e.g.*, shrink wrapped software), preloaded with a computer  
10 system (*e.g.*, on system ROM or fixed disk), or distributed from a server or electronic bulletin board over the network (*e.g.*, the Internet or World Wide Web).

Thus, the present invention may be embodied as a method for supporting virtual private networks in a label switched communication system having an ingress device in communication with an egress device via a number of intermediate devices by including  
15 label information and a virtual private network identifier in Next Hop Resolution Protocol messages, the virtual private network identifier identifying a virtual private network, and using said Next Hop Resolution Protocol messages to dynamically establish a label switched path for the virtual private network. The label information and the virtual private network identifier may be included within a Next Hop Resolution Protocol message in a  
20 type-length-value field having at least a virtual private network identifier field for carrying the virtual private network identifier and a label information field for carrying the label information.

The method may be used to dynamically establish a label switched path for a forward path from the ingress device to the egress device for the virtual private network,  
25 specifically by sending a Next Hop Resolution Protocol request message by the ingress device, forwarding the Next Hop Resolution Protocol request message hop-by-hop from the ingress device to the egress device by each intermediate device that is on the forward path, sending a Next Hop Resolution Protocol reply message by the egress device, and forwarding the Next Hop Resolution Protocol reply message hop-by-hop from the egress  
30 device to the ingress device by each intermediate device that is on the forward path. In order to forward Next Hop Resolution Protocol messages, each intermediate device may

maintain previous hop state information, in which case each intermediate device forwards the NHRP reply message based upon the previous hop state information, or else each intermediate device may insert its address into a forward path address list in the NHRP request message, in which case each intermediate device forwards the NHRP reply message based upon a return path address list in the NHRP reply message. The egress device allocates a forward path label for a label switched path segment from the previous hop device on the forward path to the egress device, and includes the forward path label in the NHRP reply message. Each intermediate device allocates a forward path label for a label switched path segment from the previous hop device on the forward path to the intermediate device, and includes the forward path label in the NHRP reply message.

The method may also be used to dynamically establish a label switched path for a return path from the egress device to the ingress device, specifically by sending a NHRP request message by the ingress device and forwarding the NHRP request message hop-by-hop from the egress device to the ingress device by each intermediate device that is on the forward path. The ingress device allocates a return path label for a label switched path segment from a next hop device on the forward path to the ingress device, and includes the return path label in the NHRP request message. Each intermediate device on the forward path allocates a return path label for a label switched path segment from a next hop device on the forward path to the intermediate device, and includes the return path label in the NHRP request message.

The present invention may also be embodied as a device for supporting virtual private networks in a label switched communication system. The device includes label switching logic for establishing a label switched path for the virtual private network using Next Hop Resolution Protocol messages, wherein the label switching logic includes a label request and a virtual private network identifier in Next Hop Resolution Protocol request messages, and wherein the label switching logic includes label mapping information and the virtual private network identifier in Next Hop Resolution Protocol reply messages.

An ingress device includes transmitting logic for transmitting to a next hop device in the communication network a Next Hop Resolution Protocol request message including a label request and the virtual private network identifier and receiving logic for receiving from said next hop device in the communication network a Next Hop Resolution Protocol

reply message including a forward path label for a label switched path segment to said next hop device in the communication network and the virtual private network identifier. The label switching logic establishes a label switched path to said next hop device in the communication network using said forward path label. The ingress device may also  
5 include return path label allocation logic for allocating a return path label for a label switched path segment from the next hop device in the communication network to the ingress device. The ingress device includes the return path label in addition to the label request and the virtual private network identifier in the NHRP request message.

An intermediate device includes request message receiving logic for receiving from  
10 a previous hop device in the communication network a first Next Hop Resolution Protocol request message including a label request and the virtual private network identifier, request message transmitting logic for transmitting to a next hop device in the communication network a second Next Hop Resolution Protocol request message including the label request and the virtual private network identifier, reply message receiving logic for  
15 receiving from said next hop device in the communication network a first Next Hop Resolution Protocol reply message including label mapping information and the virtual private network identifier, forward path label allocation logic for allocating a forward path label for a label switched path segment from the previous hop device in the communication network, and reply message transmitting logic for transmitting to said  
20 previous hop device in the communication network a second Next Hop Resolution Protocol reply message including said forward path label and the virtual private network identifier.

In order to forward NHRP messages, the request message receiving logic may maintain previous hop state information for said previous hop device in the  
25 communication network upon receiving the first NHRP request message, in which case the reply message transmitting logic transmits the second NHRP reply message to said previous hop device in the communication network based upon the previous hop state information. Alternatively, the request message transmitting logic may insert a device address into a forward path address list and include the forward path address list in the  
30 second NHRP request message, in which case the reply message transmitting logic transmits the second NHRP reply message to said previous hop device in the

communication network based upon a previous hop device address in a return path address list in the NHRP reply message.

5 The intermediate device may receive a forward path label in the first NHRP reply message for a label switched path segment from the intermediate device to said next hop device in the communication network, in which case the label switching logic establishes a label switched path to said next hop device in the communication network using said forward path label.

10 The intermediate device may receive a return path label in the first NHRP request message for a label switched path segment from the intermediate device to said previous hop device in the communication network, in which case the label switching logic establishes a label switched path to said previous hop device in the communication network using said return path label.

15 The intermediate device may also include return path label allocation logic for allocating a return path label for a label switched path segment from said next hop device in the communication network to the intermediate device. The intermediate device includes the return path label in addition to the label request and the virtual private network indicator in the second NHRP request message.

20 An egress device includes receiving logic for receiving from a previous hop device in the communication network a Next Hop Resolution Protocol request message including a label request and the virtual private network identifier, forward path label allocation logic for allocating a forward path label for a label switched path segment from said previous hop device in the communication network, and transmitting logic for transmitting to said previous hop device in the communication network a Next Hop Resolution Protocol reply message including said forward path label and the virtual private network  
25 identifier. The egress device may receive a forward path address list in the NHRP request message, in which case the egress device includes a return path address list in the NHRP reply message. The egress device may receive a return path label in the NHRP request message for a label switched path segment from the egress device to said previous hop device in the communication network, in which case the label switching logic establishes a  
30 label switched path to said previous hop device in the communication network using said return path label.

5 The present invention may also be embodied as a program product comprising a computer readable medium having embodied therein a computer program for supporting virtual private networks in a label switched communication system, the computer program comprising label switching logic programmed to establish a label switched path for the virtual private network using Next Hop Resolution Protocol messages, wherein the label switching logic is programmed to include a label request and a virtual private network identifier in Next Hop Resolution Protocol request messages, and wherein the label switching logic is programmed to include label mapping information and the virtual private network identifier in Next Hop Resolution Protocol reply messages.

10 The present invention may also be embodied as a communication system comprising an ingress device in communication with an egress device via a number of intermediate devices, wherein a label switched path is established for a virtual private network by including label information and a virtual private network identifier in Next Hop Resolution Protocol messages and using said Next Hop Resolution Protocol messages to dynamically establish the label switched path for the virtual private network.

15 The present invention may be embodied in other specific forms without departing from the essence or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive.

We claim:

1. A method for supporting virtual private networks in a label switched communication system having an ingress device in communication with an egress device via a number of intermediate devices, the method comprising:

including label information and a virtual private network identifier in Next Hop Resolution Protocol messages, the virtual private network identifier identifying a virtual private network; and

using said Next Hop Resolution Protocol messages to dynamically establish a label switched path for the virtual private network.

2. The method of claim 1, wherein the label information and the virtual private network identifier is included within a Next Hop Resolution Protocol message in a type-length-value field having at least a virtual private network identifier field for carrying the virtual private network identifier and a label information field for carrying the label information.

3. The method of claim 1, wherein using said Next Hop Resolution Protocol messages to dynamically establish a label switched path for the virtual private network comprises using said Next Hop Resolution Protocol messages to dynamically establish a label switched path for a forward path from the ingress device to the egress device for the virtual private network.

4. The method of claim 3, wherein using said Next Hop Resolution Protocol messages to dynamically establish the label switched path for the forward path from the ingress device to the egress device for the virtual private network comprises:

sending a Next Hop Resolution Protocol request message by the ingress device;

forwarding the Next Hop Resolution Protocol request message hop-by-hop from the ingress device to the egress device by each intermediate device that is on the forward path;

sending a Next Hop Resolution Protocol reply message by the egress device; and

forwarding the Next Hop Resolution Protocol reply message hop-by-hop from the egress device to the ingress device by each intermediate device that is on the forward path.

5. The method of claim 4, wherein the Next Hop Resolution Protocol request message is a Next Hop Resolution Protocol Resolution Request message, and wherein the label information comprises a label request.

6. The method of claim 4, wherein the Next Hop Resolution Protocol reply message is a Next Hop Resolution Protocol Resolution Reply message, and wherein the label information comprises label mapping information.

7. The method of claim 4, wherein the Next Hop Resolution Protocol reply message is a Next Hop Resolution Protocol Label Mapping message, and wherein the label information comprises label mapping information.

8. The method of claim 4, wherein forwarding the Next Hop Resolution Protocol request message by an intermediate device comprises:  
receiving the Next Hop Resolution Protocol request message from a previous hop device on the forward path;  
maintaining previous hop state information for said previous hop device; and  
forwarding the Next Hop Resolution Protocol request message to a next hop device on the forward path.

9. The method of claim 8, wherein forwarding the Next Hop Resolution Protocol reply message by an intermediate device comprises:  
receiving a first Next Hop Resolution Protocol reply message from a next hop device on the forward path;  
allocating a forward path label for a label switched path segment from a previous hop device on the forward path to said intermediate device; and  
sending a second Next Hop Resolution Protocol reply message including said forward path label and the virtual private network identifier to said previous hop device on

the forward path based upon the previous hop state information.

10. The method of claim 4, wherein forwarding the Next Hop Resolution Protocol request message by an intermediate device comprises:

5 receiving the Next Hop Resolution Protocol request message from a previous hop device on the forward path, the Next Hop Resolution Protocol request message including a forward path address list;

adding an intermediate device address to the forward path address list in the Next Hop Resolution Protocol request message; and

10 forwarding the Next Hop Resolution Protocol request message including the forward path address list to a next hop device on the forward path.

11. The method of claim 10, wherein the forward path address list comprises a Next Hop Resolution Protocol Forward Transit NHS Record Extension field.

12. The method of claim 4, wherein forwarding the Next Hop Resolution Protocol reply message by an intermediate device comprises:

15 receiving a first Next Hop Resolution Protocol reply message from a next hop device on the forward path, the Next Hop Resolution Protocol reply message including a return path address list including at least an address of a previous hop device on the forward path;

allocating a forward path label for a label switched path segment from a previous hop device on the forward path to said intermediate device; and

20 sending a second Next Hop Resolution Protocol reply message including said forward path label and the virtual private network identifier to said previous hop device on the forward path based upon the address in the return path address list.

13. The method of claim 4, wherein sending a Next Hop Resolution Protocol reply message by the egress device comprises:

30 receiving the Next Hop Resolution Protocol request message from a previous hop device on the forward path;



allocating a forward path label for a label switched path segment from said previous hop device on the forward path to the egress device; and

5 sending the Next Hop Resolution Protocol reply message including said forward path label and the virtual private network identifier to said previous hop device on the forward path.

14. The method of claim 13, wherein the Next Hop Resolution Protocol request message includes a forward path address list including at least an address of the previous hop device on the forward path, and wherein sending the Next Hop Resolution Protocol  
10 reply message to the previous hop device on the forward path comprises sending the Next Hop Resolution Protocol reply message to the previous hop device on the forward path based upon the address in the forward path address list.

15. The method of claim 1, wherein using said Next Hop Resolution Protocol  
15 messages to dynamically establish a label switched path for the virtual private network comprises using said Next Hop Resolution Protocol messages to dynamically establish a label switched path for a return path from the egress device to the ingress device for the virtual private network.

16. The method of claim 15, wherein using said Next Hop Resolution Protocol  
20 messages to dynamically establish the label switched path for the return path from the egress device to the ingress device for the virtual private network comprises:

sending a Next Hop Resolution Protocol request message by the ingress device;  
and

25 forwarding the Next Hop Resolution Protocol request message hop-by-hop from the egress device to the ingress device by each intermediate device that is on the forward path.

17. The method of claim 15, wherein sending the Next Hop Resolution Protocol  
30 request message by the ingress device comprises:

allocating a return path label for a label switched path segment from a next hop

device on the forward path to the ingress device; and

sending the Next Hop Resolution Protocol request message including said return path label and the virtual private network identifier to said next hop device on the forward path.

5

18. The method of claim 15, wherein forwarding the Next Hop Resolution Protocol request message by an intermediate device comprises:

receiving a first Next Hop Resolution Protocol request message from a previous hop device on the forward path;

10

allocating a return path label for a label switched path segment from a next hop device on the forward path to the intermediate device; and

sending a second Next Hop Resolution Protocol request message including said return path label and the virtual private network identifier to said next hop device on the forward path.

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167

19. A device for supporting virtual private networks in a label switched communication system, the device comprising label switching logic operably coupled to establish a label switched path for the virtual private network using Next Hop Resolution Protocol messages, wherein the label switching logic includes a label request and a virtual private network identifier in Next Hop Resolution Protocol request messages, and wherein the label switching logic includes label mapping information and the virtual private network identifier in Next Hop Resolution Protocol reply messages.

20. The device of claim 19, wherein the label switching logic comprises:  
transmitting logic operably coupled to transmit to a next hop device in the communication network a Next Hop Resolution Protocol request message including a label request and the virtual private network identifier; and

receiving logic operably coupled to receive from said next hop device in the communication network a Next Hop Resolution Protocol reply message including a forward path label for a label switched path segment to said next hop device in the communication network and the virtual private network identifier.

21. The device of claim 20, wherein the label switching logic is operably coupled to establish the label switched path to said next hop device in the communication network using said forward path label.

22. The device of claim 20, wherein the label switching logic further comprises return path label allocation logic operably coupled to allocate a return path label for a label switched path segment from said next hop device in the communication network, and wherein the transmitting logic is operably coupled to transmit to said next hop device in the communication network the Next Hop Resolution Protocol request message including said return path label in addition to the label request and the virtual private network identifier.

23. The device of claim 19, wherein the label switching logic comprises:  
request message receiving logic operably coupled to receive from a previous hop

device in the communication network a first Next Hop Resolution Protocol request message including a label request and the virtual private network identifier;

request message transmitting logic operably coupled to transmit to a next hop device in the communication network a second Next Hop Resolution Protocol request message including the label request and the virtual private network identifier;

reply message receiving logic operably coupled to receive from said next hop device in the communication network a first Next Hop Resolution Protocol reply message including label mapping information and the virtual private network identifier;

forward path label allocation logic operably coupled to allocate a forward path label for a label switched path segment from the previous hop device in the communication network; and

reply message transmitting logic operably coupled to transmit to said previous hop device in the communication network a second Next Hop Resolution Protocol reply message including said forward path label and the virtual private network identifier .

24. The device of claim 23, wherein the request message receiving logic is operably coupled to maintain previous hop state information for said previous hop device in the communication network, and wherein the reply message transmitting logic is operably coupled to transmit the second Next Hop Resolution Protocol reply message to said previous hop device in the communication network based upon the previous hop state information.

25. The device of claim 23, wherein the first Next Hop Resolution Protocol request message includes a forward path address list, and wherein the label switching logic is operably coupled to insert a device address into the forward path address list and include the forward path address list in the second Next Hop Resolution Protocol request message.

26. The device of claim 25, wherein the forward path address list comprises a Next Hop Resolution Protocol Forward Transit NHS Record Extension field.

27. The device of claim 25, wherein the first Next Hop Resolution Protocol reply

message includes a return path address list including at least an address for said previous hop device in the communication network, and wherein the reply message transmitting logic is operably coupled to transmit the second Next Hop Resolution Protocol reply message to said previous hop device in the communication network based upon the address in the list of addresses.

28. The device of claim 27, wherein the reply message transmitting logic is operably coupled to remove an address from the return path address list to form a modified return path address list and to include the modified return path address list in the second Next Hop Resolution Protocol reply message.

29. The device of claim 23, wherein the first Next Hop Resolution Protocol request message includes a return path label for a label switched path segment to said previous hop device, and wherein the label switching logic is operably coupled to establish a label switched path to said previous hop device using said return path label.

30. The device of claim 23, wherein the label switching logic further comprises return path label allocation logic operably coupled to allocate a return path label for a label switched path segment from said next hop device in the communication network, and wherein the request message transmitting logic is operably coupled to transmit to said next hop device in the communication network the second Next Hop Resolution Protocol request message including said return path label in addition to the label request and the virtual private network indicator.

31. The device of claim 19, wherein the label switching logic comprises:  
receiving logic operably coupled to receive from a previous hop device in the communication network a Next Hop Resolution Protocol request message including a label request and the virtual private network identifier;  
forward path label allocation logic operably coupled to allocate a forward path label for a label switched path segment from said previous hop device in the communication network; and

transmitting logic operably coupled to transmit to said previous hop device in the communication network a Next Hop Resolution Protocol reply message including said forward path label and the virtual private network identifier.

- 5      32.    The device of claim 31, wherein the Next Hop Resolution Protocol request message includes a forward path address list, and wherein the transmitting logic is operably coupled to include the forward path address list as a return path address list in the Next Hop Resolution Protocol reply message.

- 10      33.    The device of claim 31, wherein the Next Hop Resolution Protocol request message includes a return path label for a label switched path segment to said previous hop device in the communication network, and wherein the label switching logic is operably coupled to establish the label switched path to said previous hop device in the communication network using said return path label.

- 15      34.    The device of claim 19, wherein the Next Hop Resolution Protocol request messages comprise Next Hop Resolution Protocol Resolution Request messages.

- 20      35.    The device of claim 19, wherein the Next Hop Resolution Protocol reply messages comprise one of:

Next Hop Resolution Protocol Resolution Reply messages; and

Next Hop Resolution Protocol Label Mapping messages.

36. A program product comprising a computer readable medium having embodied therein a computer program for supporting virtual private networks in a label switched communication system, the computer program comprising label switching logic programmed to establish a label switched path for the virtual private network using Next Hop Resolution Protocol messages, wherein the label switching logic is programmed to include a label request and a virtual private network identifier in Next Hop Resolution Protocol request messages, and wherein the label switching logic is programmed to include label mapping information and the virtual private network identifier in Next Hop Resolution Protocol reply messages.

37. The program product of claim 36, wherein the label switching logic comprises: transmitting logic programmed to transmit to a next hop device in the communication network a Next Hop Resolution Protocol request message including a label request and the virtual private network identifier; and receiving logic programmed to receive from said next hop device in the communication network a Next Hop Resolution Protocol reply message including a forward path label for a label switched path segment to said next hop device in the communication network and the virtual private network identifier.

38. The program product of claim 37, wherein the label switching logic is programmed to establish the label switched path to said next hop device in the communication network using said forward path label.

39. The program product of claim 37, wherein the label switching logic further comprises return path label allocation logic programmed to allocate a return path label for a label switched path segment from said next hop device in the communication network, and wherein the transmitting logic is programmed to transmit to said next hop device in the communication network the Next Hop Resolution Protocol request message including said return path label in addition to the label request and the virtual private network identifier.

40. The program product of claim 36, wherein the label switching logic comprises:  
request message receiving logic programmed to receive from a previous hop device  
in the communication network a first Next Hop Resolution Protocol request message  
including a label request and the virtual private network identifier;

5 request message transmitting logic programmed to transmit to a next hop device in  
the communication network a second Next Hop Resolution Protocol request message  
including the label request and the virtual private network identifier;

reply message receiving logic programmed to receive from said next hop device in  
the communication network a first Next Hop Resolution Protocol reply message including  
10 label mapping information and the virtual private network identifier;

forward path label allocation logic programmed to allocate a forward path label for  
a label switched path segment from the previous hop device in the communication  
network; and

reply message transmitting logic programmed to transmit to said previous hop  
15 device in the communication network a second Next Hop Resolution Protocol reply  
message including said forward path label and the virtual private network identifier .

41. The program product of claim 40, wherein the request message receiving logic is  
programmed to maintain previous hop state information for said previous hop device in  
the communication network, and wherein the reply message transmitting logic is  
20 programmed to transmit the second Next Hop Resolution Protocol reply message to said  
previous hop device in the communication network based upon the previous hop state  
information.

25 42. The program product of claim 40, wherein the first Next Hop Resolution Protocol  
request message includes a forward path address list, and wherein the label switching logic  
is programmed to insert a device address into the forward path address list and include the  
forward path address list in the second Next Hop Resolution Protocol request message.

30 43. The program product of claim 42, wherein the forward path address list comprises  
a Next Hop Resolution Protocol Forward Transit NHS Record Extension field.



44. The program product of claim 42, wherein the first Next Hop Resolution Protocol  
reply message includes a return path address list including at least an address for said  
previous hop device in the communication network, and wherein the reply message  
transmitting logic is programmed to transmit the second Next Hop Resolution Protocol  
reply message to said previous hop device in the communication network based upon the  
address in the list of addresses.

45. The program product of claim 44, wherein the reply message transmitting logic is  
programmed to remove an address from the return path address list to form a modified  
return path address list and to include the modified return path address list in the second  
Next Hop Resolution Protocol reply message.

46. The program product of claim 40, wherein the first Next Hop Resolution Protocol  
request message includes a return path label for a label switched path segment to said  
previous hop device, and wherein the label switching logic is programmed to establish a  
label switched path to said previous hop device using said return path label.

47. The program product of claim 40, wherein the label switching logic further  
comprises return path label allocation logic programmed to allocate a return path label for  
a label switched path segment from said next hop device in the communication network,  
and wherein the request message transmitting logic is programmed to transmit to said next  
hop device in the communication network the second Next Hop Resolution Protocol  
request message including said return path label in addition to the label request and the  
virtual private network indicator.

48. The program product of claim 36, wherein the label switching logic comprises:  
receiving logic programmed to receive from a previous hop device in the  
communication network a Next Hop Resolution Protocol request message including a  
label request and the virtual private network identifier;

forward path label allocation logic programmed to allocate a forward path label for  
a label switched path segment from said previous hop device in the communication

network; and

transmitting logic programmed to transmit to said previous hop device in the communication network a Next Hop Resolution Protocol reply message including said forward path label and the virtual private network identifier.

5

49. The program product of claim 48, wherein the Next Hop Resolution Protocol request message includes a forward path address list, and wherein the transmitting logic is programmed to include the forward path address list as a return path address list in the Next Hop Resolution Protocol reply message.

10

50. The program product of claim 48, wherein the Next Hop Resolution Protocol request message includes a return path label for a label switched path segment to said previous hop device in the communication network, and wherein the label switching logic is programmed to establish the label switched path to said previous hop device in the communication network using said return path label.

15

51. The program product of claim 36, wherein the Next Hop Resolution Protocol request messages comprise Next Hop Resolution Protocol Resolution Request messages.

20

52. The program product of claim 36, wherein the Next Hop Resolution Protocol reply messages comprise one of:

Next Hop Resolution Protocol Resolution Reply messages; and

Next Hop Resolution Protocol Label Mapping messages.

53. A communication system comprising an ingress device in communication with an egress device via a number of intermediate devices, wherein a label switched path is established for a virtual private network by including label information and a virtual private network identifier in Next Hop Resolution Protocol messages and using said Next Hop Resolution Protocol messages to dynamically establish the label switched path for the virtual private network.

54. The communication system of claim 53, wherein:

the ingress device sends a Next Hop Resolution Protocol request message including at least a label request and the virtual private network identifier to a next hop device on a forward path from the ingress device to the egress device;

each intermediate device on the forward path forwards the Next Hop Resolution Protocol request message to a next hop device on the forward path;

the egress device sends a Next Hop Resolution Protocol reply message including at least forward path label mapping information and the virtual private network identifier to a previous hop device on the forward path; and

each intermediate device on the forward path forwards the Next Hop Resolution Protocol reply message to a previous hop device on the forward path.

55. The communication system of claim 54, wherein the ingress device further includes return path label mapping information in the Next Hop Resolution Protocol request message, and wherein each intermediate device on the forward path further includes return path label mapping information in the Next Hop Resolution Protocol request message.

56. A protocol message comprising:  
a virtual private network identifier identifying a virtual private network for the  
protocol message; and

label information relating to a label switched path associated with the virtual  
5 private network.

57. The protocol message of claim 56 embodied as a next hop resolution protocol  
message.

10 58. The protocol message of claim 56, wherein the label information comprises label  
request information.

59. The protocol message of claim 56, wherein the label information comprises label  
mapping information.

15 60. The protocol message of claim 56 embodied in a carrier wave for transmission over  
a communication network.

## ABSTRACT OF THE DISCLOSURE

5 A system, device, and method for supporting virtual private networks in a label  
switched communication network utilizes an extended Next Hop Resolution Protocol in  
order to establish a label switched path for a particular virtual private network.  
Specifically, label information and a corresponding virtual private network identifier are  
carried in certain Next Hop Resolution Protocol messages. A label request and a  
corresponding virtual private network identifier is carried in Next Hop Resolution Protocol  
10 Resolution Request messages that are forwarded hop-by-hop by a number of devices along  
a forward path. Label mapping information and a corresponding virtual private network  
identifier are carried in Next Hop Resolution Protocol reply messages that are forwarded  
hop-by-hop by the devices in the forward path. In various embodiments of the invention,  
the label information and the corresponding virtual private network identifier may be  
15 carried in a type-length-value field, and the Next Hop Resolution Protocol reply messages  
may be Next Hop Resolution Protocol Resolution Reply messages or novel Next Hop  
Resolution Protocol Label Mapping messages.

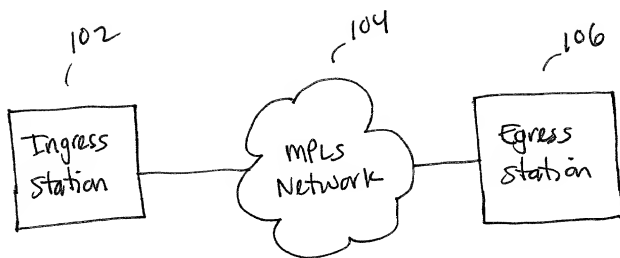


FIG. 1

100

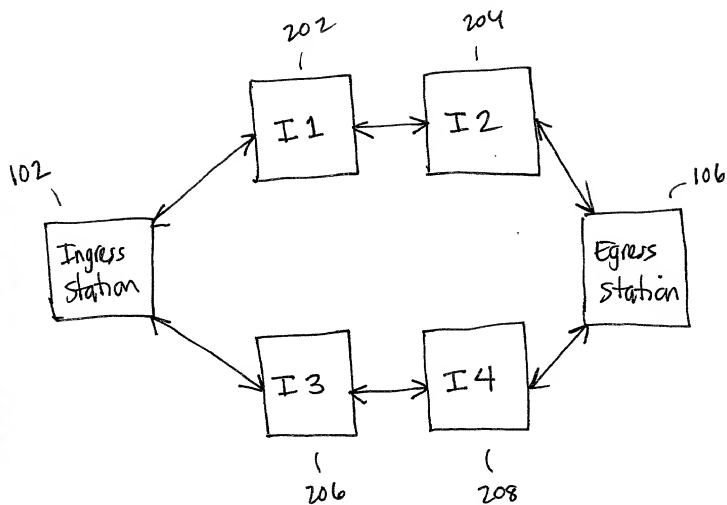


FIG. 2 200

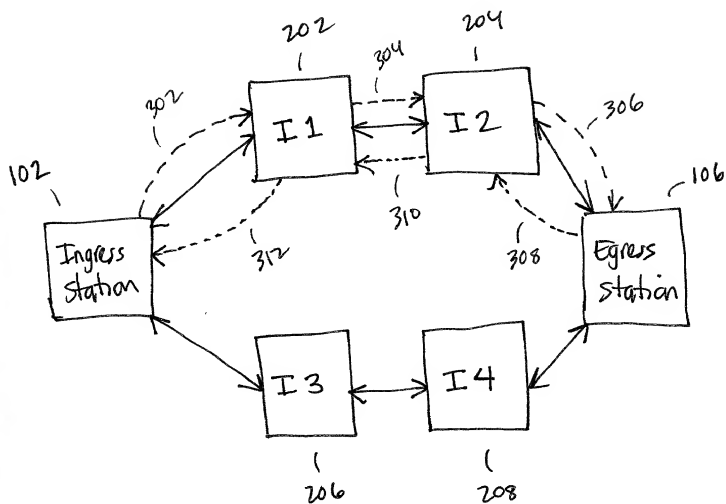


FIG. 3A



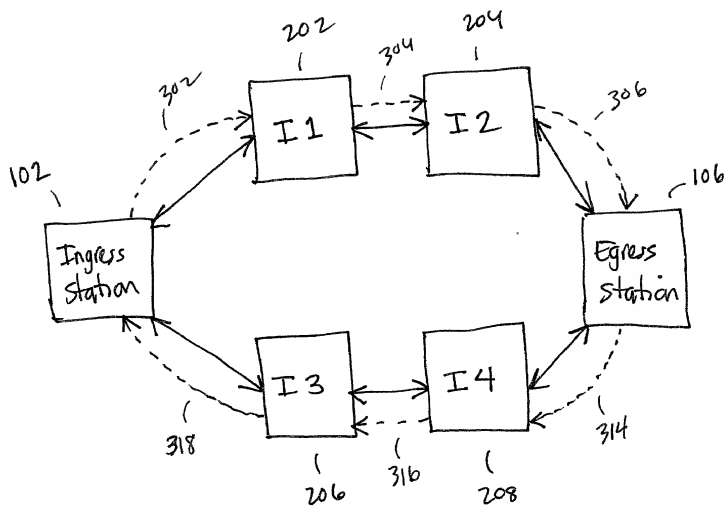


FIG. 3B

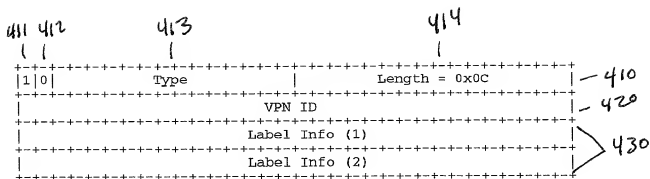


FIG. 4 400

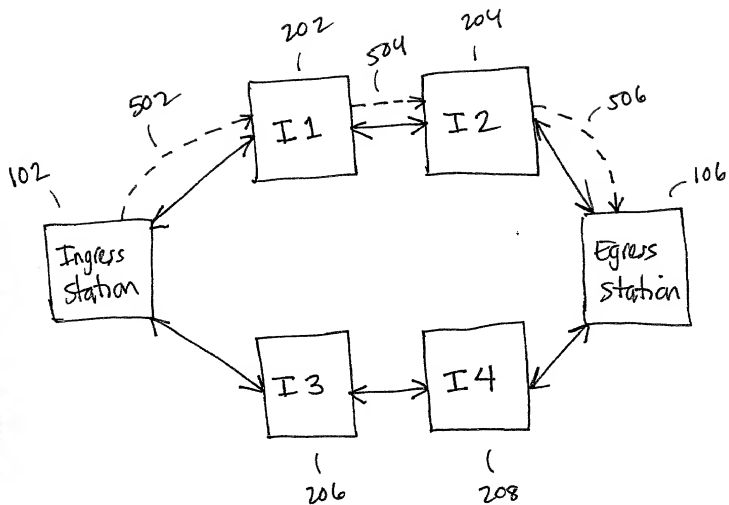


FIG. 5

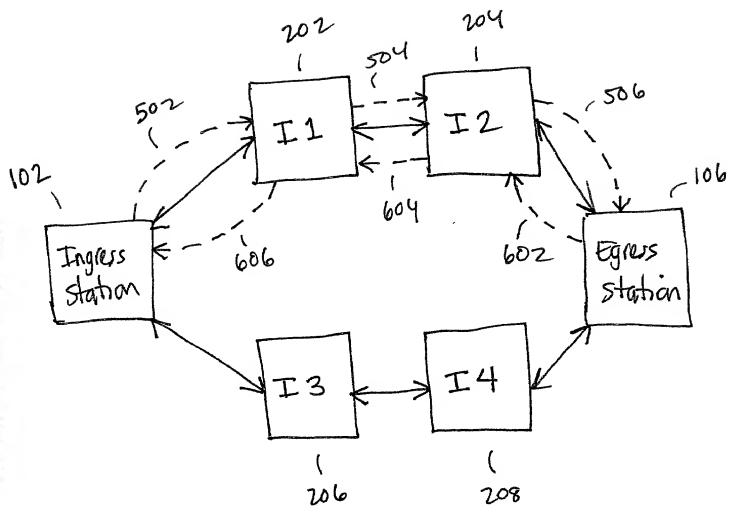


FIG. 6

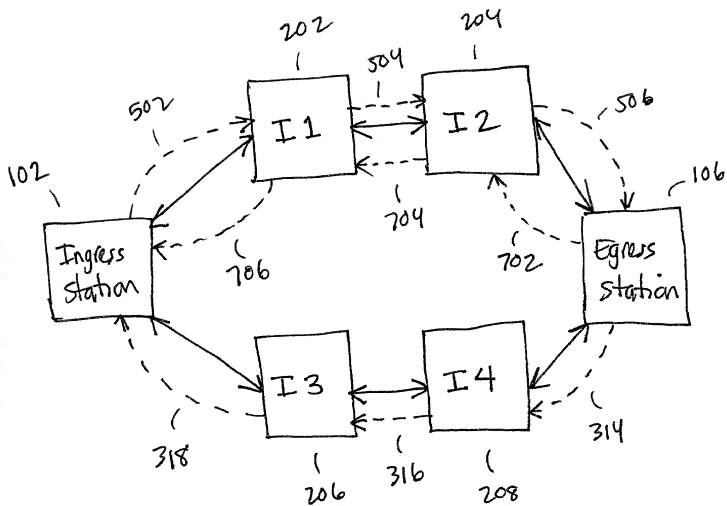


FIG. 7

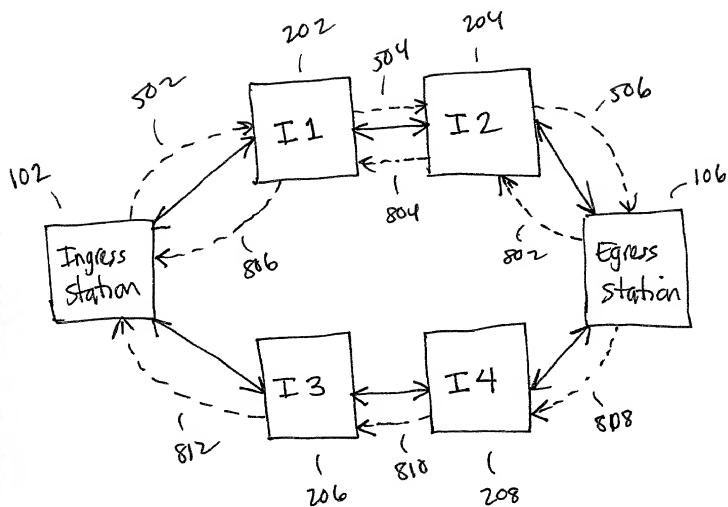


FIG. 8

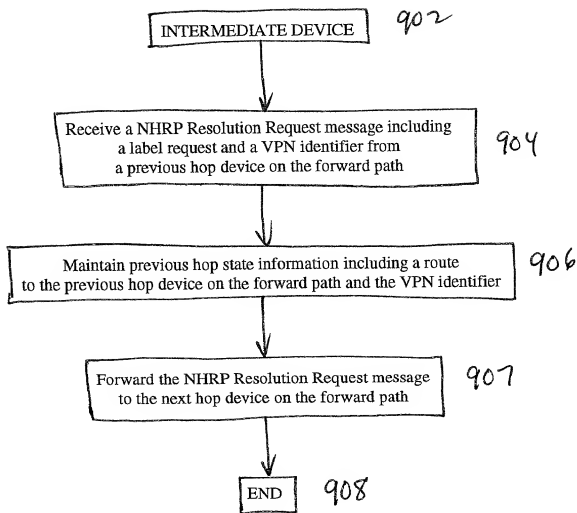


FIG. 9A

EGRESS DEVICE 910

Receive a NHRP Resolution Request message including  
a label request and a VPN identifier from  
a previous hop device on the forward path 912

Allocate a label for the previous hop LSP segment on the forward path 914

Send a NHRP Resolution Reply message including  
the label and the VPN identifier  
to the previous hop device on the forward path 916

END 918

FIG. 9B



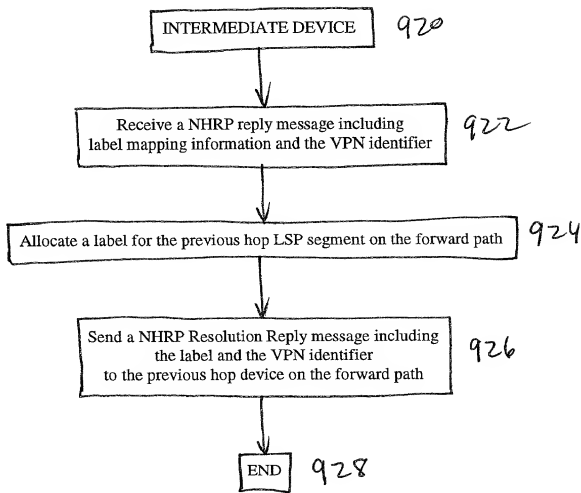


FIG. 9C

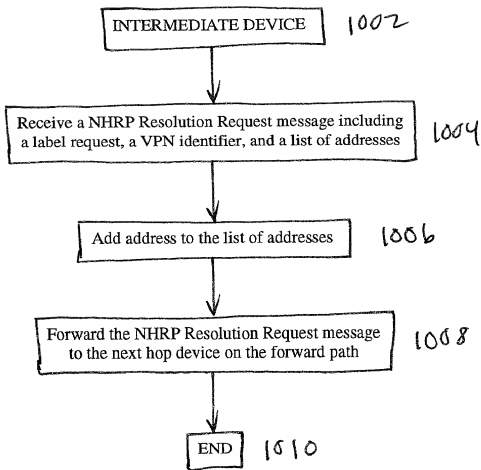


FIG. 10A

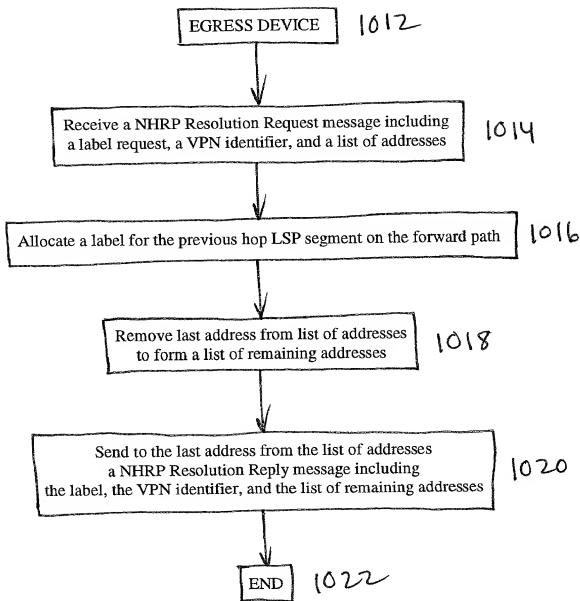


FIG. 10B

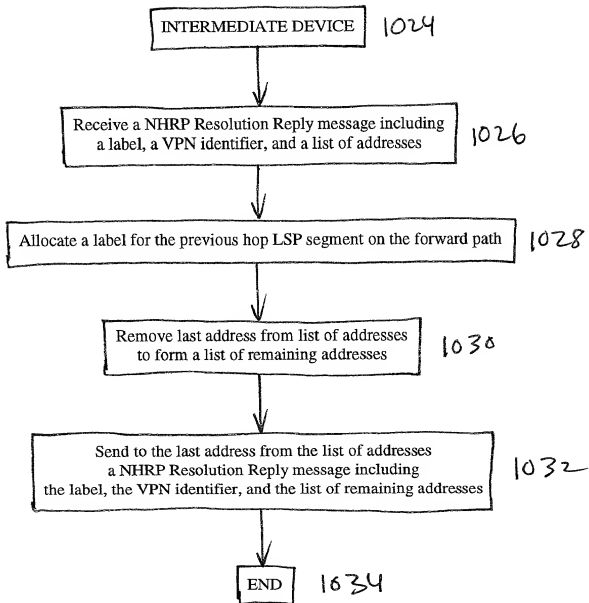


FIG. 10C

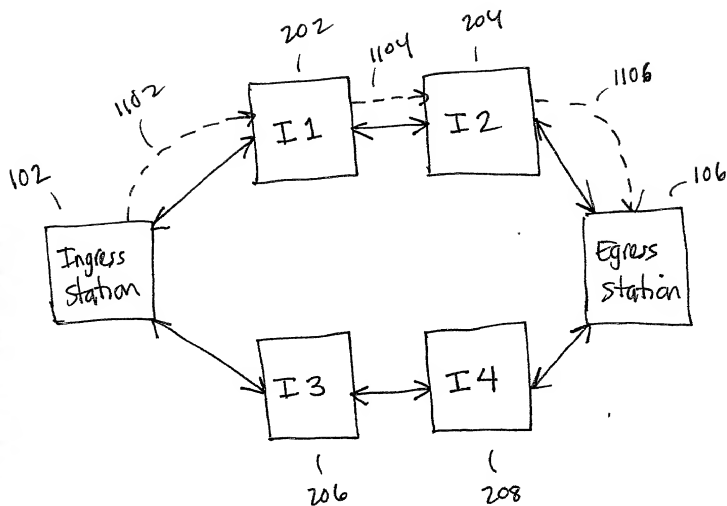


FIG. 11

Docket No.  
2284/149

# Declaration and Power of Attorney For Patent Application

## English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**SYSTEM, DEVICE, AND METHOD FOR SUPPORTING VIRTUAL PRIVATE NETWORKS IN A LABEL SWITCHED COMMUNICATION NETWORK**

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

\_\_\_\_\_  
(Number)

\_\_\_\_\_  
(Country)

\_\_\_\_\_  
(Day/Month/Year Filed)

☐

\_\_\_\_\_  
(Number)

\_\_\_\_\_  
(Country)

\_\_\_\_\_  
(Day/Month/Year Filed)

☐

\_\_\_\_\_  
(Number)

\_\_\_\_\_  
(Country)

\_\_\_\_\_  
(Day/Month/Year Filed)

☐

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Bruce D. Sunstein	Reg. No. 27,234	Jay Sandvos	Reg. No. 43,900
Robert M. Asher	Reg. No. 30,445	Sonia K. Guterman	Reg. No. 44,729
Timothy M. Murphy	Reg. No. 33,198	Keith J. Wood	Reg. No. 45,235
Steven G. Saunders	Reg. No. 36,265	Mary M. Steubing	Reg. No. 37,946
Harriet M. Strimpel	Reg. No. 37,008	Christopher J. Cianciolo	Reg. No. 42,417
Samuel J. Petuchowski	Reg. No. 37,910	Lindsay J. McGuinness	Reg. No. 38,549
Jeffrey T. Klayman	Reg. No. 39,250		
John J. Stickevers	Reg. No. 39,387		
Herbert A. Newborn	Reg. No. 42,031		
Elizabeth P. Morano	Reg. No. 42,904		
Jean M. Tibbetts	Reg. No. 43,193		

Send Correspondence to: **Jeffrey T. Klayman**  
**Bromberg & Sunstein LLP**  
**125 Summer Street**  
**Boston, MA 02110**

Direct Telephone Calls to: *(name and telephone number)*  
**Jeffrey T. Klayman at (617) 443-9292**

Full name of sole or first inventor <b>James V. Luciani</b>	
Sole or first inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of second inventor, if any <b>Andre N. Fredette</b>	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	



Full name of third inventor, if any <b>Bill Hawe</b>	
Third inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of fourth inventor, if any	
Fourth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of fifth inventor, if any	
Fifth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of sixth inventor, if any	
Sixth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	